


Material Specification

| NO | Part Name | Material |
|----|-----------|----------|
| 1  | Body      | WC6      |
| 2  | Seat      | F11+STL  |
| 3  | Disc      | F11+Cr13 |
| 4  | Hinge     | WC6      |
| 5  | Washer    | 304      |
| 6  | Disc Pin  | 304      |
| 7  | Disc Nut  | 304      |
| 8  | Hinge Pin | Cr13     |
| 9  | Gasket    | 304      |
| 10 | Cover     | WC6      |
| 11 | Eye Bolt  | 304      |
| 12 | Nut       | 4        |
| 13 | Bolt      | B16      |

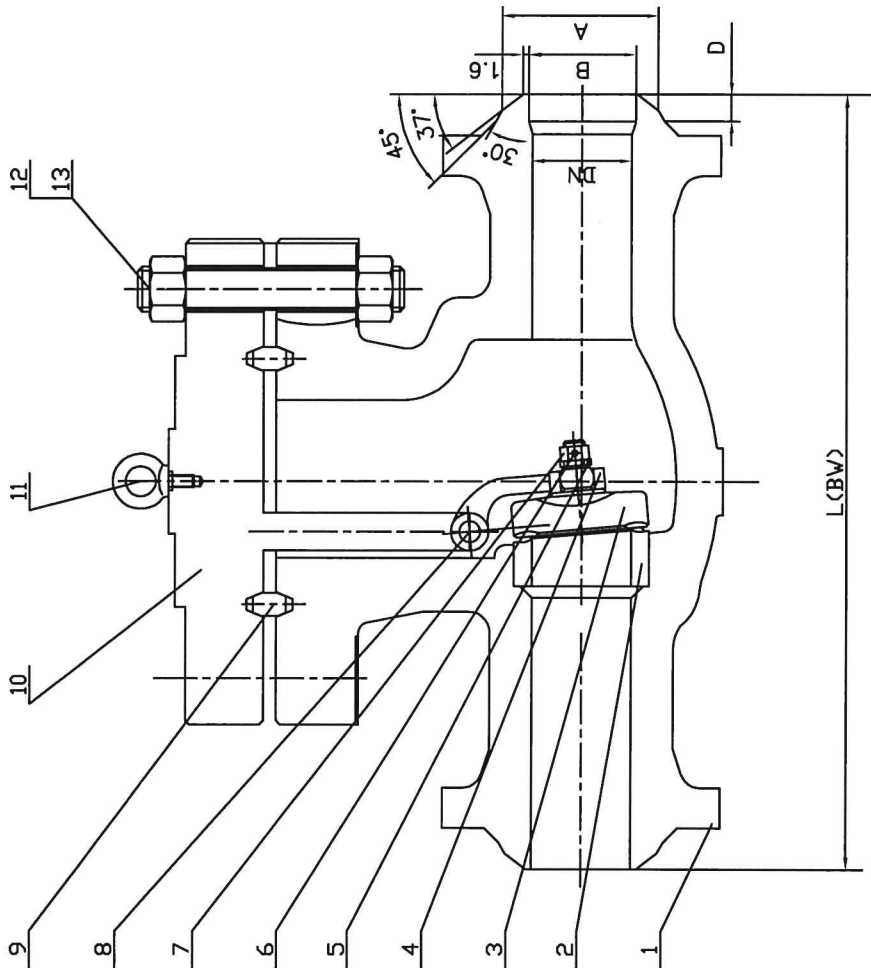

| SIZE   | L(BW) | DN | A  | B    |
|--------|-------|----|----|------|
| 2-1500 | 368   | 47 | 62 | 52.5 |

SPECIFICATION:

DESIGN: BS1868  
BUTTWELDING ENDS: ANSI B16.25  
FACE TO FACE : B16.10  
TEST & INSPECT CONFORM TO API598

| Swing Check Valve |             |       |                 |        |
|-------------------|-------------|-------|-----------------|--------|
| CLIENT            | DWG REV .NO | 00    |                 |        |
| P.O.NO            | CLASS       |       |                 | 1500LB |
| APPROVED BY       | HYDROSTATIC | SHELL | 5575psi/38.4Mpa |        |
| REVIEWED BY       | TEST (PSI)  | SEAT  | 4080psi/28.1Mpa |        |
| DRAWN BY          | AIR TSET    |       |                 |        |
| DRAWING NO        | 007         | DATE  |                 |        |